## **20ED/AD** Pintle Equipment Transport

G.V.W.R.	25,900#	Axle	(2) 10,000# Heavy Duty Dual Wheel Axles - Oil Bath; Electric Brakes (ED) or Air Brakes (AD)
G.A.W.R. (Ea. Axle)	10,000#	Supension	44K Adjustable
Coupler	60,000#, 3" ID Pintle Eye	Tire	ST235/80 R-16 Load Range E
Safety Chains	3/8" Grd. 70 w/Safety Latch Hook (2 each)	Wheel	16 x 6 Dual 8 Bolt
Jack	12K TW Drop Leg Jack	Floor	2" Nominal Oak (S4S)
Tongue	Integral w/Frame	Lights	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
Top Rail	None	Elec. Plug	7-Way RV
Frame	12" - 19# I-Beam	Finish	Steel is Cleaned to Ensure a Professional
Crossmembers	6" Jr. I-Beam on 16" Centers	(Prep)	Smooth Finish.
Side Rails	8" Channel	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.


#### Standard Features

- 3 Position Pintle Adjustment
- Storage Area in Tongue
- Modular Sealed Wiring Harness
- Bolt On Jack
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- · 2 Side Bed Steps
- Oak Flooring

- 6 5/8" O.D. D-Rings
- 12-1/4 x 4 HD Brakes; Electric has complete Break-A-Way System and Air has Automatic Slack Adjusters, Spring Brakes and ABS
- 5' Dove Tail w/Double Hinged Spring Assist Ramps
- · Grommet Mount Sealed LED Lighting

#### Description

Dimensions					
Length	Α	В	С		
20' + 5'	300"	113"	187"		
24' + 5'	348"	137"	211"		

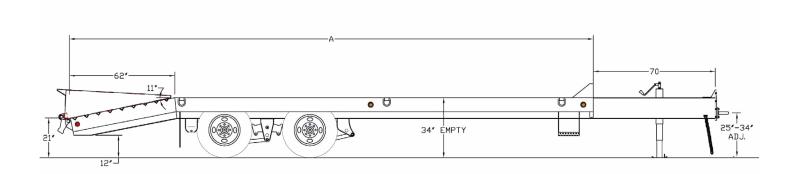

# **20:0/AU** Pintle Equipment Transport



Model	Weight*	Description
20ED-20+5	5,900#	102" X 20'+ 5' Tandem Dual 25,900# Pintle w/Electric Brakes
20ED-24+5	7,020#	102" x 24' + 5' Tandem Dual 25,900# Pintle w/Electric Brakes
20AD-20+5	5,900#	102" x 20' + 5' Tandem Dual 25,900# Pintle w/Air Brakes
20AD-24+5	7,020#	102" x 24' + 5' Tandem Dual 25,900# Pintle w/Air Brakes

<sup>\*</sup>Weights shown are for base models without options and are estimates only

### Optional Equipment

Category	Description
JACKS	Dual Single Speed Drop Leg Jack
JACKS	Single 2 Speed Drop Leg Jack
JACKS	Dual 2 Speed Landing Gear Jacks (50K)
TIRE/WHEEL	Spare Tire (ST235/80 R-16 LR-E Dual)
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G Dual)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G Dual)
TIRE/WHEEL	Tire Upgrade (ST215/75 R-17.5 LR-H Dual)
TIRE/WHEEL	Spare Tire Upgrade (ST215/75 R-17.5 LR-H Dual)
TIRE/WHEEL	Vertical Spare Mount
BODY	Lockable Lid Cover Tool Storage in Tongue
CARGO CONTROL	Extra 5/8" D-Ring (Each)